


## **2025 LINER ORDER FORM**

PHONE: 260-637-0141

Date:	PO/Job Name:		Wall (Select One)	Corners (Choose & Fill In)
Customer:			☐ Bead	☐ Radius:
Order By:			☐ Vertical Overlap (IN):	☐ Diagonal:
Shipping Information:			☐ Horizontal Overlap (IN):	 □ Square:
			Default Wall Seam Center Shallow End	
			Vinyl Covered Step: □	s / No  (Provide DWG if Yes)
Mark Box:			Interior Molded Step:	☐ (Mark Location & Size)
Pattern:		Mil:	Exterior Molded Step:	☐ (Mark Location & Size)
TRUE-L / GRECIAN TRUE-L		NEY / FIGURE 8		AN / OCTAGON
	HOPPER PAD		<u> </u>	☐ GRECIAN
LAZY-L / GRECIAN LAZY-L CIRCLE BREAK LINE		STANDARD ORT/SAFETY I		STANDARD  STANDING IN DEEP LOOKING TO SHALLOW  SPORT/SAFETY LEDGE
DIAGONALS TO 90°	NOTES:			
STANDING IN THE SHALLOW END IN DIRECTION (LEFT SHOWN - SELECTION CLEFT RIGHT	T ONE)	TIONAL DRAWIN	IGS ARE INCLUDED ☐ (CI	HECK HERE)


Only Pool Products


# 2025 SUPPLEMENTAL TOP VIEW FORM

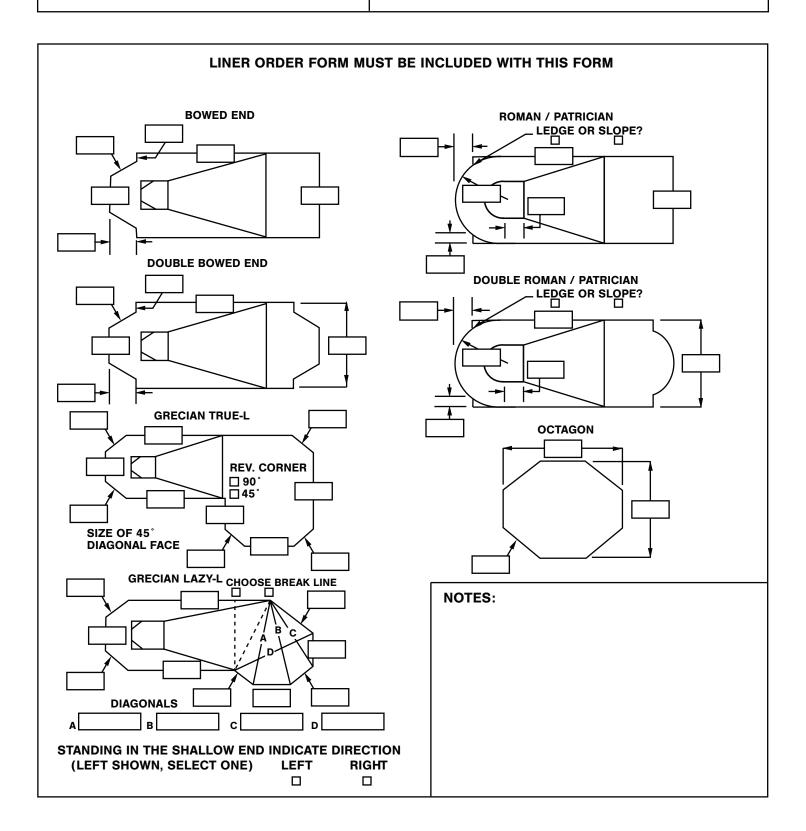

## **2025 SUPPLEMENTAL** TRIANGULATION FORM

## LINER ORDER FORM MUST BE INCLUDED WITH THIS FORM

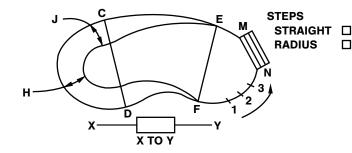



FINISHED WALL HEIGHT \_\_

FINISHED DEPTH \_\_\_\_\_

STANDING IN THE SHALLOW END INDICATE DIRECTION (LEFT SHOWN - CHECK ONE) LEFT\_\_\_\_ RIGHT\_\_\_\_

THIS FORM IS TO BE USED WHEN A FACTORY DRAWING IS UNAVAILABLE.

### NOTE:

IT IS IMPORTANT TO FOLLOW THE DIRECTIONS ON THIS FORM. ANY DEVIATION MAY CAUSE UNWANTED DELAYS. DOUBLE CHECK YOUR MEASUREMENTS FOR ACCURACY. LAYOUTS GENERATED ARE ONLY AN INTERPRETATION OF THE INFORMATION SUPPLIED.

### NOTE:

TAKE MEASUREMENTS ON THE PERIMETER AT DISTANCES NO GREATER THAN 2 FEET, IF THE POOL HAS TIGHT CURVES OR ANGLES, TAKE MEASUREMENTS AT DISTANCES NO GREATER THAN 12 INCHES, TO CAPTURE ALL SPECIAL FEATURES

## **INSTRUCTIONS:**

LOCATE POINT "X" APROXIMATELY 1/4 OF THE TOTAL LENGTH FROM THE DEEP END TOWARD THE CENTER. LOCATE POINT "Y" APPROXIMATELY 1/4 OF THE TOTAL LENGTH FROM THE SHALLOW END TOWARD THE CENTER. PLACE BOTH POINTS APPROXIMATELY 3 FEET FROM THE BOTTOM EDGE OF THE POOL. (SEE DRAWING ABOVE FOR CLARIFICATION) THEN PLACE POINTS "C,D,E,F" AT THE AREAS OF THE BREAK LINES IN THE DEEP AND SHALLOW END(S). IF THE POOL HAS A STEP OR A STRAIGHT STEP CUT, PLACE POINTS "M & N" TO REFERENCE THE STEP AREA.

BEGIN TAKING MEASUREMENTS AT THE APPROXIMATE CENTER OF THE SHALLOW END IN 2 FOOT INCREMENTS (MAXIMUM). TAKE AS MANY MEASUREMENTS AS NEEDED TO COMPLETE THE PERIMETER OF THE POOL. THE MEASUREMENTS SHOULD BE TAKEN IN A COUNTER-CLOCKWISE FASHION FROM THE STARTING POINT (1). EACH MEASUREMENT SHOULD BE TAKEN FROM THE "X & Y" REFERENCE POINTS. THE DEPTH(S) AND SLOPE(S) SHOULD BE MEASURED ALONG THE DIAGONALS.

•			
X TO PT Y TO PT	X TO PT Y TO PT		
1	21		
2	22		
3	23		
4	24		
5	25		
6	26		
7	27		
8	28		
9	29		
10	30		
11	31		
12	32		
13	33		
14	34		
15	35		
16	36		
17	37		
18	38		
19	39		
20	40		
х то ү то	C TO E		
cc	D TO F		
DD	C TO D		
EE	E TO F		
F F	C TO F		
	D TO E		
BACK SLOPE "H"	STEPS		
SIDE SLOPE "J"	X TO Y TO		
OVERALL WIDTH	M M		
OVERALL LENGTH	N N		

M TO N



# 2025 SUPPLEMENTAL VINYL OVER STEP FORM

